



5. Full-fledged Restoration of Temporarily Restored Facilities (Relay Transmission Lines) - Measures for Bridge Zones -

- Newly laid cables over a long area across the river as an emergency measure to restore the relay cables which were washed away due to the collapse of a bridge.
- During the full-fledged restoration process, we aim to improve reliability by newly installing conduit lines under the river and establish an alternate route to a bridge further upstream. (In the case of Rikuzentakata-shi, Iwate prefecture)

Emergency restoration (laid cables over a long area across the river)

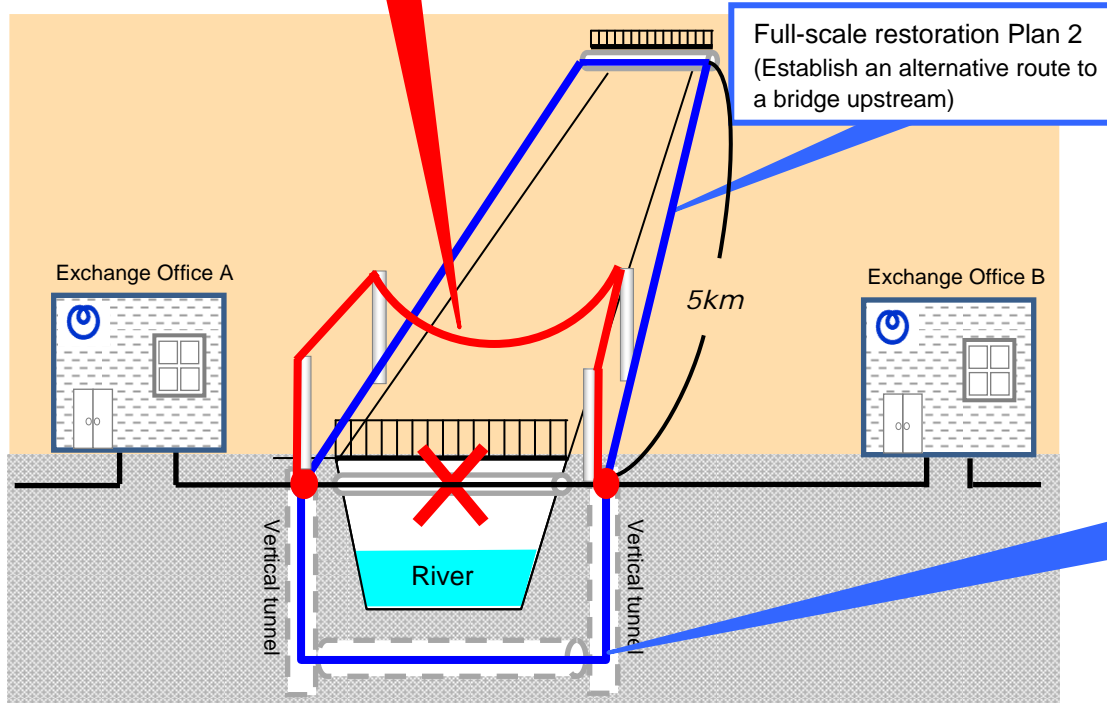

Full-fledged restoration Plan 1 (Lay cables under the river)

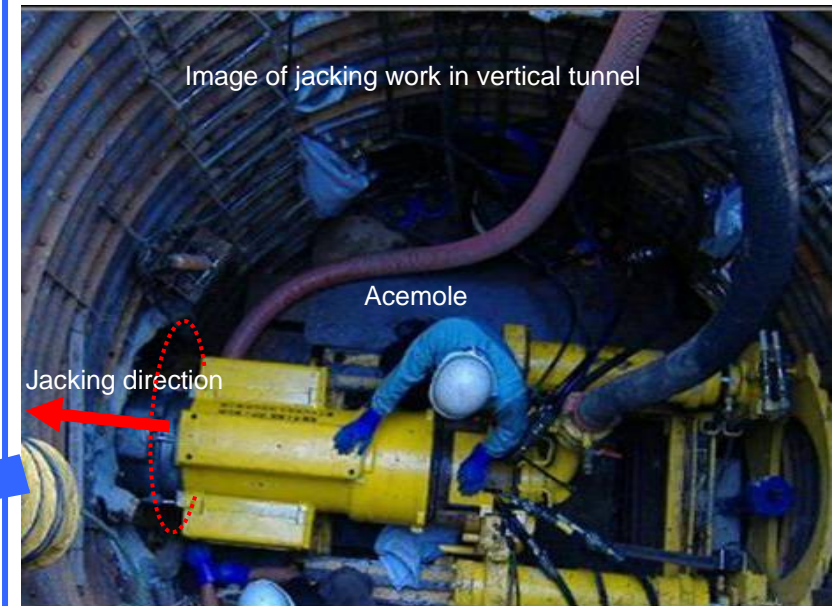

*Acemole: trenchless construction method that NTT independently developed and is a drilling method for laying conduit lines.